Rockfon®

Part of the ROCKWOOL Group

Chicago Metallic™ Ultraline T15 3500

Datasheet

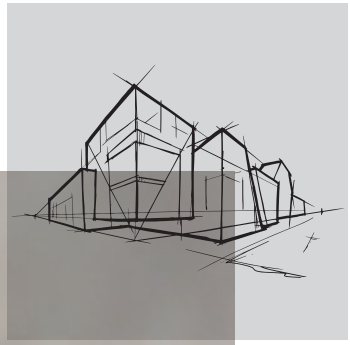

Chicago Metallic™ Ultraline T15 3500

- Grid with an aesthetic shape and central groove creating a designer ceiling finish
- Grid with a bayonet main runner coupling and 'click ' cross tee couplings
- 41 mm main and cross tees with range of accessories
- Special accessories can be adapted on the central groove to hang signages
- Fire rating A1 as per EN 13501-1
- An audible ' click ' for fast and accurate installation

Cross-section



Compatible tiles

Semi-concealed

Coupling

Butt-cut end

Assortment

Product group		Component description	Height (mm)	Length (mm)	Body Material thickness	Colour	Pcs per pack	Lm per pack	Kg per pack
Main runner									
UL MR		Ultraline main runner	41	3600	0.38mm	02	20	72	22.35
UL MR			41	3000	0.38mm	02	20	60	18.95
UL MR			41	3600	0.38mm	8WB	20	72	22.35
UL MR			41	3000	0.38mm	8WB	20	60	18.95
Cross tee									
UL CT		Ultraline cross tee - with 1 slot	41	1200	0.38mm	02	40	48	14.8
UL CT		Ultraline cross tee - w/o miter	41	1200	0.38mm	02	40	48	14.8
UL CT		Ultraline cross tee - with 1 slot	41	1200	0.38mm	8WB	40	48	14.8
UL CT		Ultraline cross tee - w/o miter	41	1200	0.38mm	8WB	40	48	14.8
UL CT		Ultraline cross tee	41	600	0.38mm	02	70	42	12.9
UL CT			41	600	0.38mm	8WB	70	42	12.9
Wall angle options									
L20x14		L Wall angle 20 x 14mm	20	3000	0.4mm	02	40	120	14.78
W22x15x15x15		W Profile 22 x 15 x 15 x 15mm	22	3000	0.4mm	02	40	120	28.5
Accessories									
SH 80		Direct suspension clip. T-profile H 80mm. Max. weight 35 kg	54.6	36			150		3.32
FH B		Hanger. Height 57.5mm. Max weight 35kg	57.5	21.5			200		3.21
UL BOLT M6		Bolt M6x25 for fixation clip T15					100		0.7
UL PSH		Plastic sign hanger for Ultraline®					100		0.1

Position of slots and suspension holes

Product group	Component description	Height (mm)	Length (mm)	Slots	Distance between slots (mm)
UL MR	Ultraline main runner	41	3600	6	 300 / 600 / 4 x 600 / 300
UL MR		41	3000	5	 300 / 600 / 3 x 600 / 300
UL CT	Ultraline cross tee - with 1 slot	41	1200	1	 600 / 600
UL CT	Ultraline cross tee - w/o miter	41	1200	1	 600 / 600
UL CT	Ultraline cross tee	41	600	0	 600

Performance

Load bearing capacity

	Kg/m²
	Maximum deflection
Hanger distance (mm)	3.3 mm
1200	12

Reaction to fire

Non-combustible

Environment

Fully Recyclable

Rockfon® is a registered trademark
of the ROCKWOOL Group.

07.2020 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon Singapore
ROCKWOOL Building Materials (Singapore) Pte Ltd.
No. 8, Tuas Avenue 2
Jurong Town
Singapore 639448
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533

Rockfon Malaysia
Chicago Metallic (Malaysia) Sdn Bhd
PTD 220527,
Jalan Indah Gemilang,
Taman Perindustrian Cemerlang,
81800 Ulu Tiram,
Johor, Malaysia
Tel: (+607) 863 3539
Fax: (+607) 863 1525

Rockfon Hong Kong
ROCKWOOL Building Materials (Hong Kong) Ltd. Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924

Rockfon®